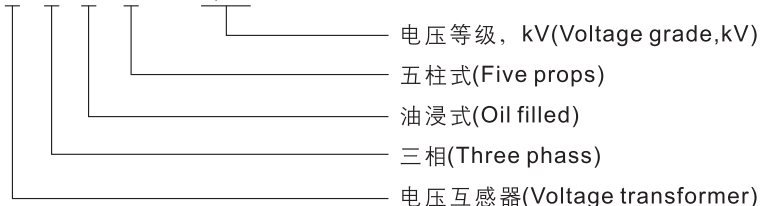


JOSEF约瑟**电压互感器 油浸式****voltage transformer Oil- immersed type****立式(stand modal)****卧式(lie modal)****JSJW-6,10 型电压互感器****JSJW-6,10G Voltage transformer type****概述 Description**

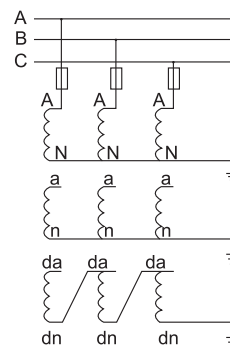
本型电压互感器为三相五柱油浸式户内型产品，适用于额定频率50Hz或60Hz、额定电压6、10kV及以下的电力系统中，作电能计量、电压监控和继电保护用。

The voltage transformer of the types JSJW-6 and JSJW-10 are three phases, five props, and oil filled products. They are used for metering electric energy, voltage control and relay protection in the electric system up to rated frequency 50Hz or 60Hz and voltage 10kV.

型号含义 Type designation**J S J W - 6,10****结构简介 Construction**

本型电压互感器的铁心由冷轧硅钢片叠成，采用油浸式绝缘。油箱呈圆形，箱壁上部有吊攀，下部有接地螺栓和放油塞，箱底有四个安装孔。

The iron core of this voltage transformer is laminated by cold-rolled silicon steel sheet. The product is oil filled insulated. The oil box is circular. There have rings on the top of the box, have earthen bolt and stopper of give oil out on the below.

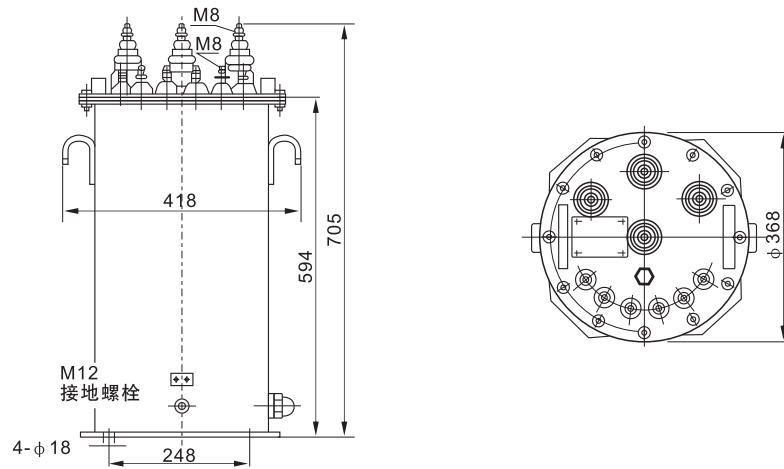
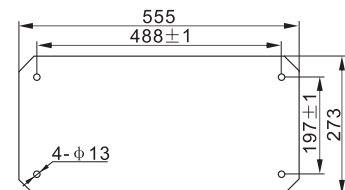
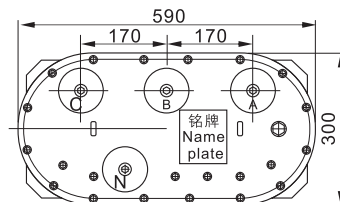
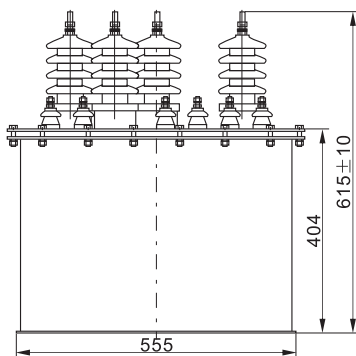
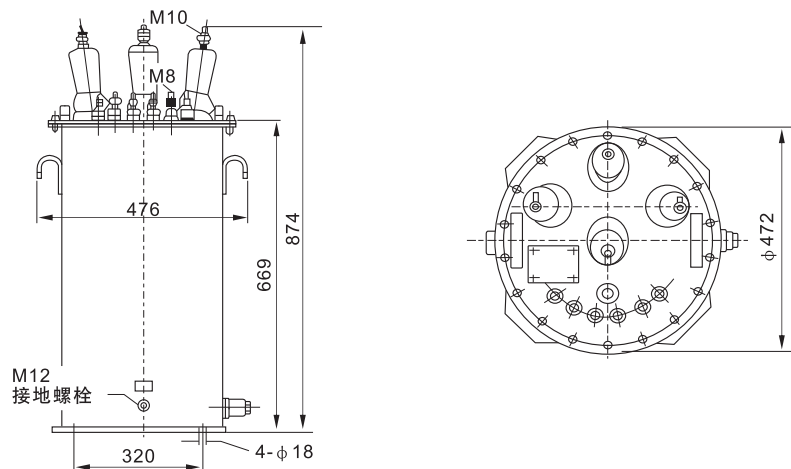


常规接线方式
Routine wiring diagram

技术参数 Technical data

- 1.技术参数见表；
- 2.污秽等级：Ⅱ级。
- 1.Technical data form;
- 2.Antipollution class: II class.

型号 Type	额定电压比(V) Rated voltage Tation(V)	额定输出 Rated output(vA)				极限输出 Limit output(vA)	额定绝缘水平 Rated insulated level(kV)
		0.2	0.5	1	3		
JSJW-6	6000/100		80	150	320	640	7.2/32/60
JSJW10	10000/100	60	120	200	480	960	12/42/75

JOSEF约瑟**电压互感器 油浸式****voltage transformer Oil-immersed type****外形尺寸 Overall Dimension****JSJW-6 Overall Dimension**
(立式户内型)**JSJW-10 Overall Dimension**
(立式户内型)**JSJW-6,10 Overall Dimension**
(卧式户外型)

注意事项：使用时二次绕组不许短路及超负荷运行。

Notice details: In using , the secondary wiring can't be short-circuited or operating over-load.