



LZZB9-35,40.5C(D) 型电流互感器


LZZB9-35,40.5C(D) Current Transformer

概述 Description

本系列电流互感器为环氧树脂浇注全封闭产品，适用于额定频率50Hz或60Hz、额定电压35kV及以下的电力系统中，作电能计量、电流测量和继电保护用。本产品符合IEC185及GB1208-1997《电流互感器》标准。

The current transformers of types LZZB9-35 are casting resins and fully enclosed. It is used for metering electric energy and current, relay protection in the electrical system up to rated frequency 50Hz or 60Hz and rated voltage 35kV. The transformers can be executed according to the standards IEC185 and GB1208-1997.

型号含义 Type designation

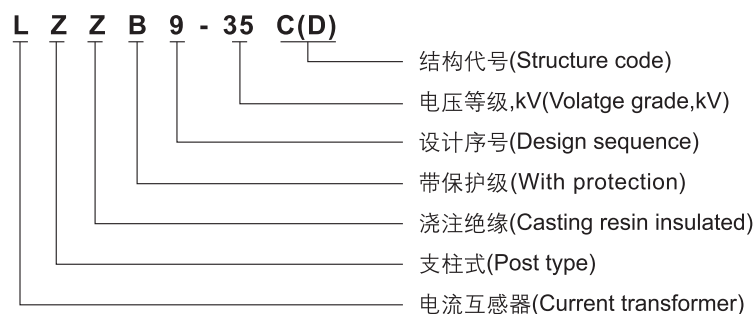

结构简介 Construction

本系列电流互感器为全封闭式柱式结构，耐污染及潮湿，尺寸小，重量轻，适用于任何位置、任意方向安装。

This current transformer is fully enclosed and posts type product. It has a good ability of antipollution and moisture proof. It is small and light. It can be mounted in any position you like.

技术参数 Technical data


型号 Type	额定一次 电流 Rated primary current(A)	准确级组合 Accuracy class	额定输出 Rated output(VA)			短时热电流(I _{th}) short time thermal current (KA)	动稳定电流(I _{dyn}) dynamic current(KA)
			0.2	0.5	10P10		
LZZB9 -35C	30-300	0.2/0.5	10	15	15	150 I _n / I	375 I _n
	400-1250	0.2/10P10				31.5/3	
	1500-1600	0.5/10P10	15	25	30	31.5/4	80
	2000				40		

JOSEF约瑟


电流互感器 户内 环氧浇注
Current Transformer indoor resin casting type

型号 Type	额定一次 电流 Rated primary current(A)	准确级组合 Accuracy class	额定输出 Rated output(VA)					短时热电流 (Ith) short time thermal current (KA)	动稳定电流 (Idyn) dynamic current(KA)
			0.2	0.5	10P10	10P15	10P20		
LZZB9-35D	30-100	0.2/10P10/10P10						150 I 1n/2	375 I 1n/2
	150	0.2/10P15/10P15	15	30	50	30	20	31.5/1	80
	200	0.2/10P10/10P20						31.5/2	80
	300-500	0.2/10P15/10P20	15	30	50	30	20	31.5/3	80
	600-800	0.5/10P10/10P10						31.5/4	80
	1000-2000	0.5/10P15/10P20	40	50	50	50	30	40/4	100

外形尺寸 Overall Dimension

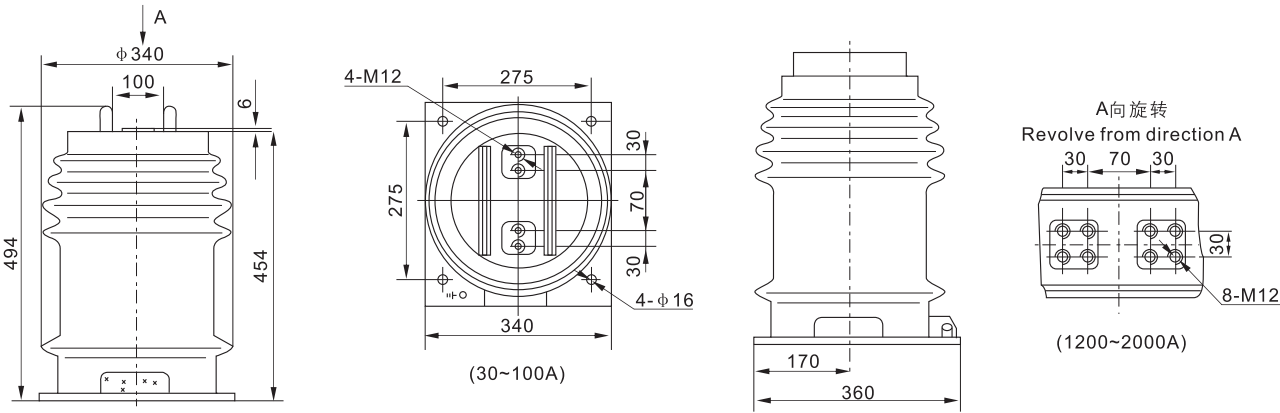

LZZB9-35C Overall Dimension

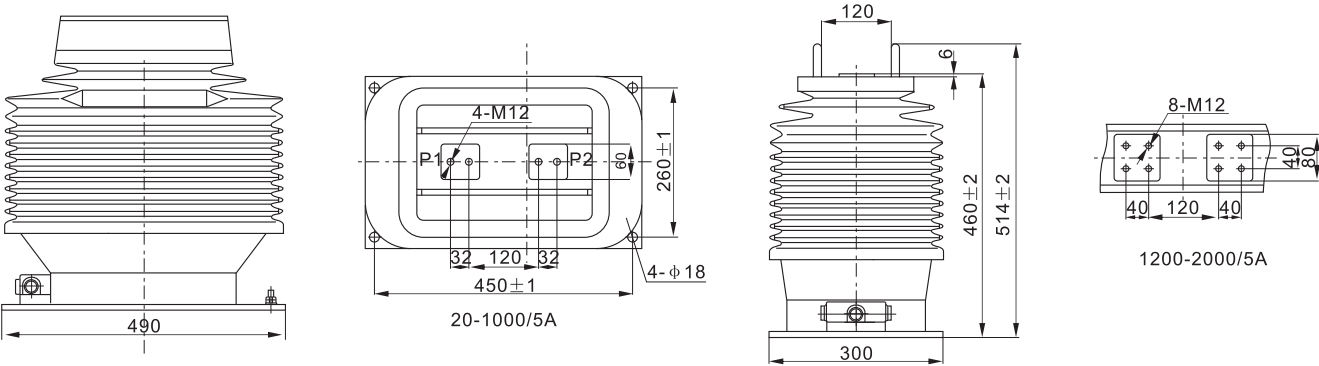

LZZB9-35D Overall Dimension