

JDJ(J)2-35/JD(X)N2-35 型电压互感器

JDJ(J)2-35/JD(X)N2-35 Voltage Transformer

概述 Description

本系列电压互感器为单相油浸式产品，适用于额定频率为50Hz或60Hz、额定电压35kV及以下的电力系统中，作电能计量、电压监控和继电保护用。

The voltage transformer of the type JDJ(J)2-35 is single phase and oil-filled product. It is used for metering electric energy, voltage control and relay protection in the electric system up to rated frequency 50Hz or 60Hz and rated voltage 35kV.

型号含义 Type designation

J	D	J	J	2	-	35	
							电压等级,kV(Voltage grade,kV)
							设计序号(Design sequence)
							接地保护(Ground protection)
							油浸式(Oil filled)
							单相(Single phase)
							电压互感器(Voltage transformer)

结构简介 Construction

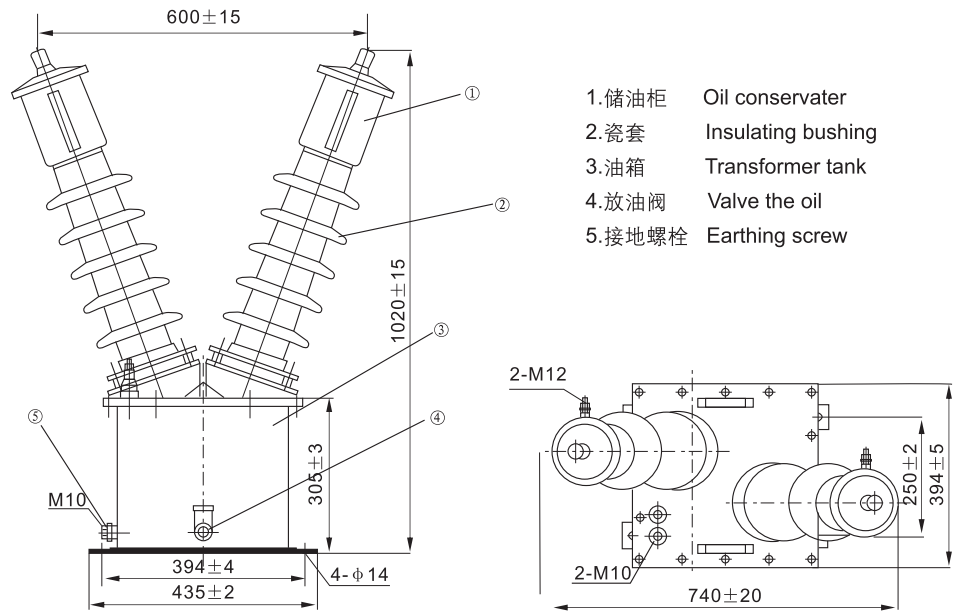
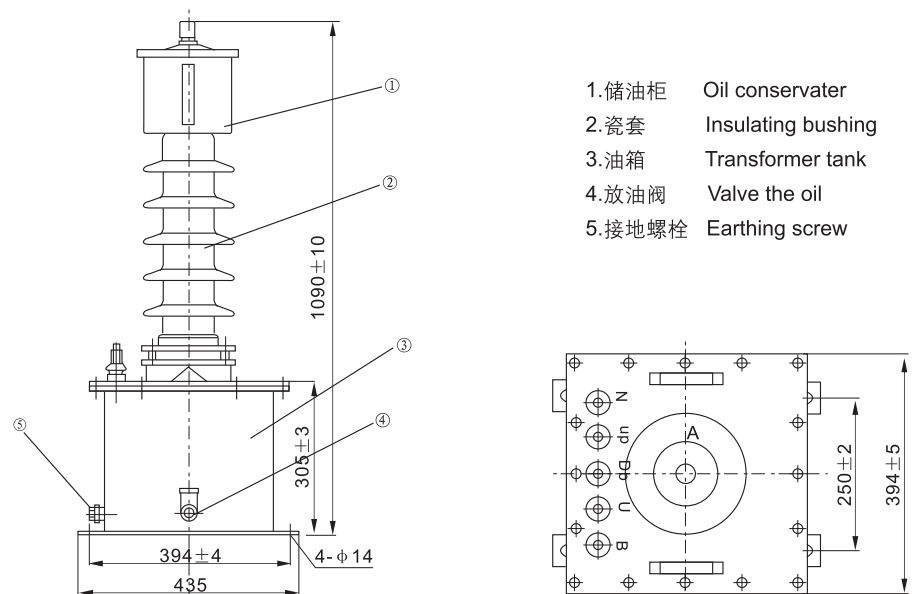
本系列电压互感器的铁心由长形硅钢片叠成，为三柱芯式，器身用铁夹件固定在箱盖上，在箱盖上装有一次及二次套管等，油箱用钢板焊成，油箱壁下部装有接地螺栓及放油塞，箱底有四个安装孔。

This voltage transformer has three poles and the iron core is made of sheet. The body is fixed on the box cover by clamping. There have the primary and secondary busbar also on the box cover.

技术参数 Technical data

- 1.额定绝缘水平：40.5/95/200kV；
- 2.技术参数表。
- 1.Rated insulated level:40.5/95/200kV；
- 2.Technical data form.

型号 Type	额定电压比 Rated voltage ratio(V)	额定输出 Rated output(VA)				极限输出 Limit output (VA)
		0.2	0.5	1	6P	
JDJ2-35	35000/100	75	150	250		1000
JDJJ2-35	$35000/\sqrt{3}/100/\sqrt{3}/100/3$	75	150	250	100	
	$35000/\sqrt{3}/100/\sqrt{3}/100/\sqrt{3}/100/3$	30	60		100	2×500

JOSEF约瑟**电压互感器 户内(外) 油浸式****Voltage Transformer indoor(outdoor) Oil filled****外形尺寸 Overall Dimension****JDJ2-35/(JDN2)-35
Overall Dimension****JDJJ2-35/(JDXN2)-35
Overall Dimension****注意事项:**

1.使用时二次绕组不许短路及超负荷运行;

Notice details:

1.In using, the secondary wineing can' t be short-circuited or opeating over-load.