
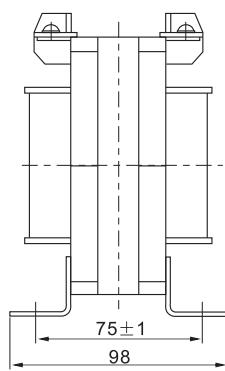


低压电压互感器 户内干式

Voltage transformer drying type wed indoors

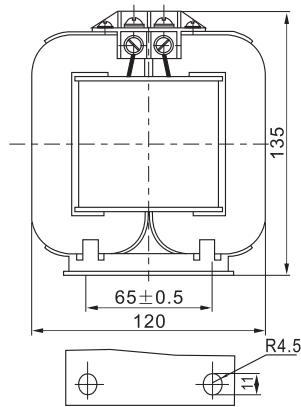

JDG4-0.5 Overall Dimension

JDG-0.5.JDG4-0.5 型电压互感器 JDG-0.5.JDG4-0.5 voltage transformer

概述 Description

本型电压互感器适用于额定频率为50Hz或60Hz、额定电压为0.5kV及以下的电力系统中，作电能、电压的测量和继电保护用。

The voltage transformer is used for measuring electric energy and voltage , relay protection in the electric system up to rated frequency 50Hz or 60Hz and rated voltage 0.5kV.

型号含义 Type designation

J	D	G	4	-	0.5	
电压等级, kV(voltage grade,kV)						
设计序号(Design NO .)						
干式(dry type)						
单相(single phase)						
电压互感器(voltage transformer)						

结构简介 Construction

本型电压互感器铁心采用优质冷轧硅钢片制成C型，一、二次绕组套在两个C型铁心的中柱上，出线头均在接线座上引出，严禁超负荷运行。

The core of the voltage transformer is shaped “C” by using good hand-rolled silicon steel sheet. The primary and secondary winding are sheathed on the middle prop. The end of the wire can be drawn front the connection pedestal. Operating over load is forbidden.

技术参数 Technical data

额定电压比 Rated voltage ratio(V)	额定输出 Rated output(VA)			极限输出 Limit output (VA)
	0.5	1	3	
220/100				
380/100	15	25	50	100
500/100				

JDG-0.5 Overall Dimension

